

TIPS TO ENSURE THAT YOUR INTERIOR DOOR SYSTEM GIVES YOU TROUBLE FREE SERVICE.

A) When you have unwrapped your tracking, spray an even amount of silicon spray along the inside edges of the top track where the door guides touch.

B) Apply clear bumpons to side moulds to control impact when closing the doors.


C) Ensure that you keep the bottom track free of dust or any small objects that may interfere with the smooth running of the doors.

Soft-close mechanisms

If you have ordered soft-closers these will come prefitted to the top of your wardrobe doors. Each soft-close mechanism requires a wall liner or wall to work against and so the maximum number of doors possible in a two-track arrangement using soft closers is four (two front doors and two rear doors). In 5-door arrangements the central door cannot be fitted with a soft-close mechanism.

The diagram opposite shows the positions of the soft-close mechanisms, depending upon which door arrangement is ordered.

To enable the doors to close softly you will also need to fix a 'soft-close activator' to the top track for each soft-close mechanism fitted. The correct number of soft-close activators will be delivered with your doors. For correct positioning/fixing of the soft-close activator please see the next step.

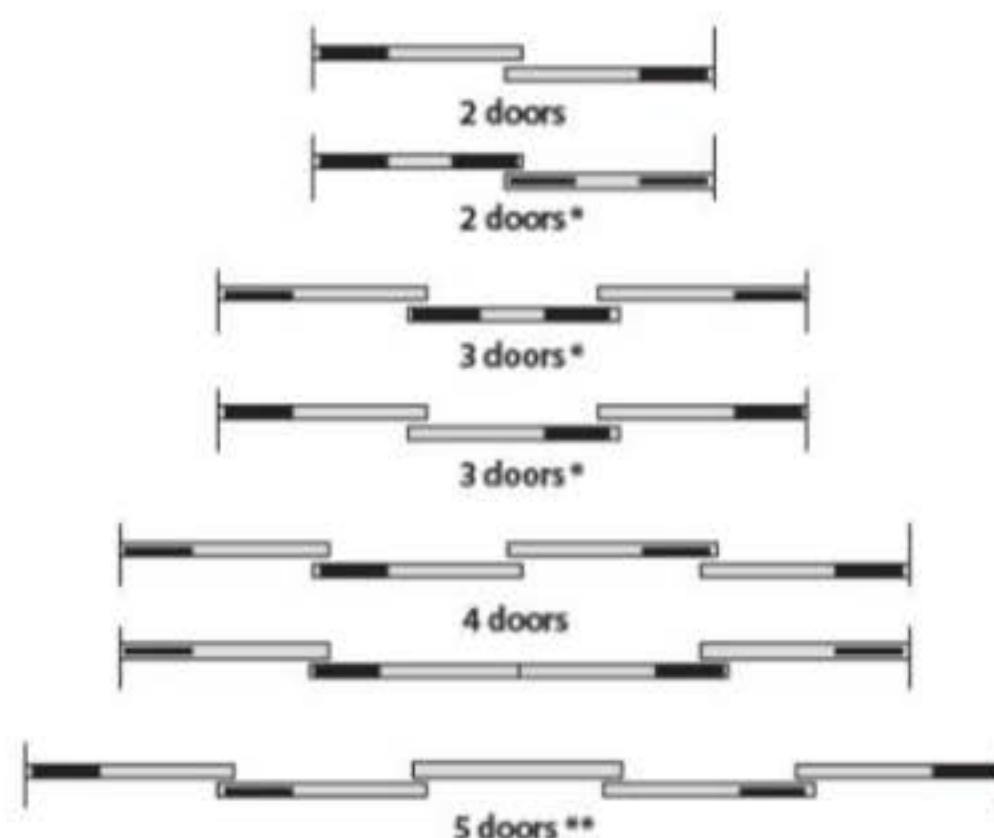


* In 2-door or 3-door arrangements where two soft-closers are fitted to each end of a single door, the door must be a minimum width of 950mm to allow both soft-closers to be installed. Doors fitted with a single soft-closer must be minimum width of 650mm.

** In 5-door arrangements the central door cannot be fitted with a soft-close mechanism.

Fixing the soft-close activators

Using a 3mm diameter bit, drill two holes into the appropriate channel of the the top track, along its centre line - the first 130mm from the end of the track and the second 235mm from the end of the track depending on whether you have a steel or aluminium track. Then, depending on whether you have steel or aluminium framing for your sliding doors, follow the appropriate directions below:

a. Steel track

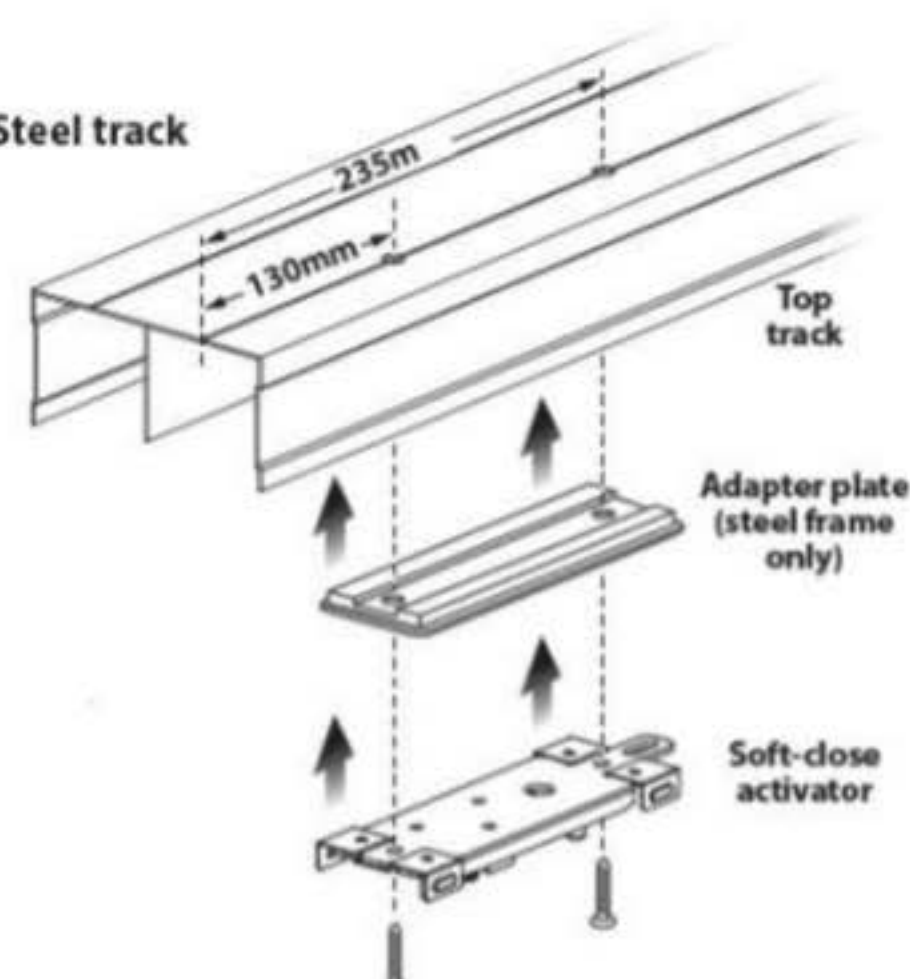

Steel Frame

An adapter plate is provided which should be placed between the top track and the soft-close activator itself. It helps the activator sit flat in the top track and has locator pegs that help you to attach it to the soft-close activator – see illustration a.

Screw the adapter plate and the soft-close activator to the top track with the protruding metal lug of the softclose activator pointing away from the wall end of the door.

Aluminium Frame

The soft-close activator should be located directly against the top track – see illustration b.

Screw the soft-close activator to the top track with the protruding metal lug pointing away from the wall end of the door.




Priming the soft-close activators

If it is already flush with the surface of the soft-close activator, flick the green plastic height indicator peg up so that it protrudes from the surface of the activator – see illustration a. The height indicator peg needs to be positioned so that it just touches the top of the soft-close mechanism (fitted to the top of the wardrobe door) and connects with the green plastic wheel protruding from the top surface of the mechanism when the door is slid towards it – see illustration b.

To achieve the correct position:

- either adjust the height of the door (see section 7)
- or;
- adjust the height of the soft-close activator using the screw thread and a 2.5mm diameter allen key – see illustration c.

The door is set to the correct height once you can close the door and you hear the audible 'click' of the height indicator peg being pushed closed. The soft-closer is now set up and should automatically soft-close the door when it is slid to this position.

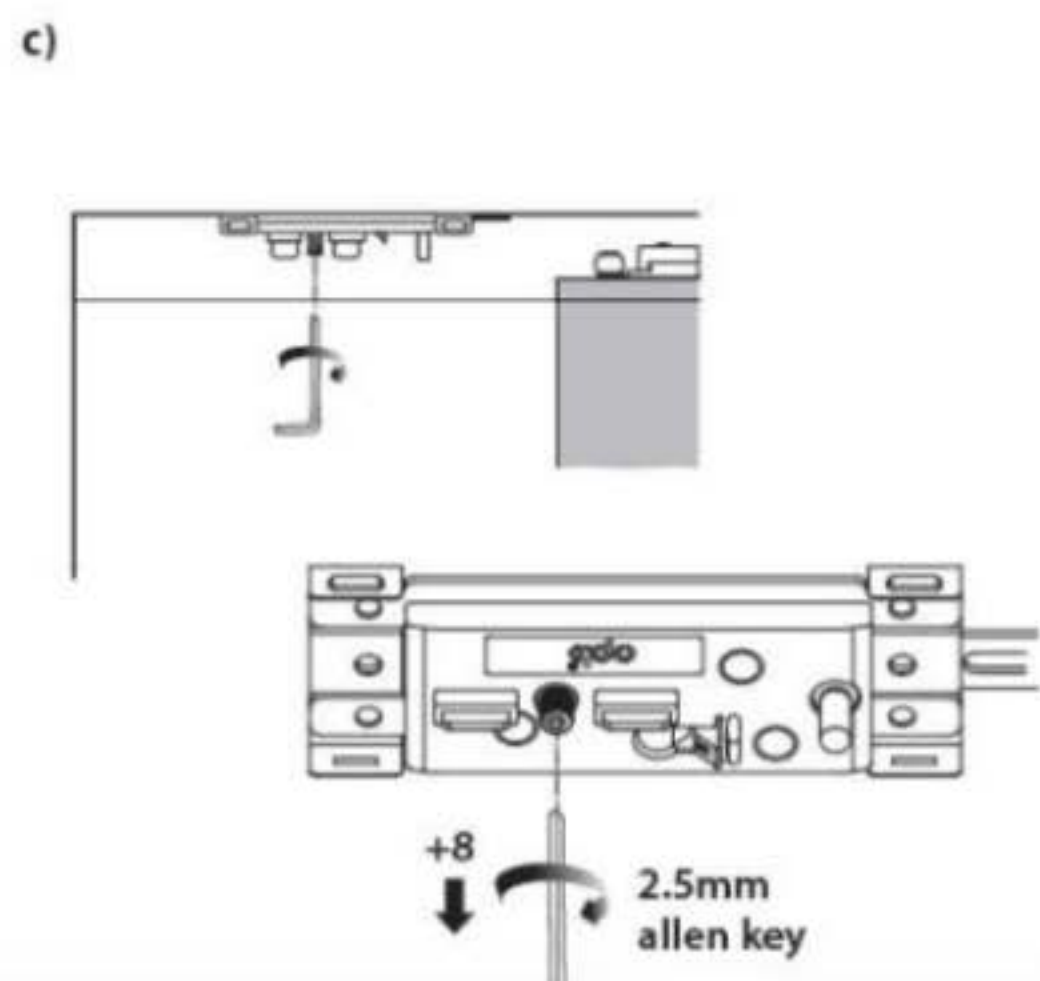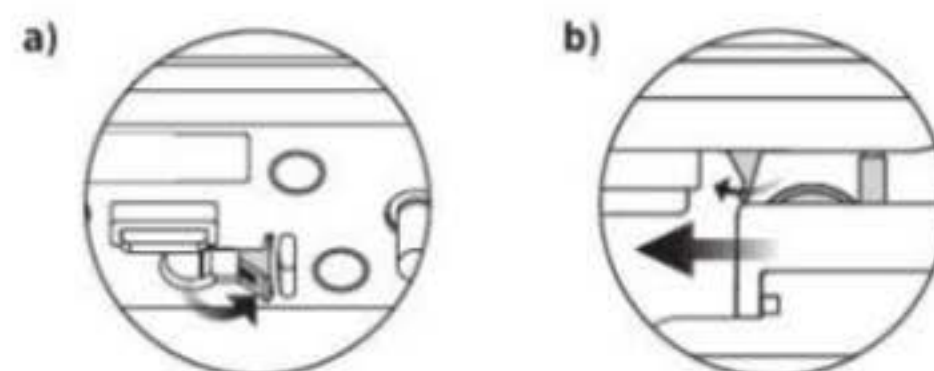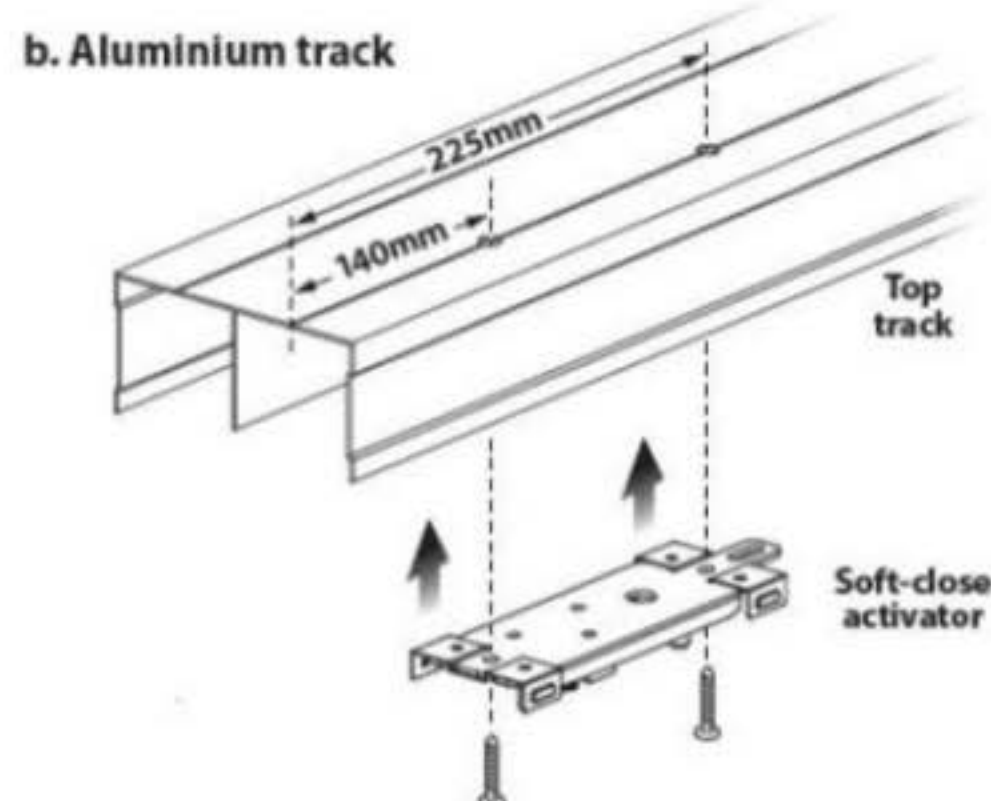





HOW TO FIT SLIDING DOORS

Fitting Instructions

Express, Premium & Deluxe
Please read carefully! SOME instructions vary.
Follow instructions for YOUR system!

- 1 Check your opening for any hidden electrical wires and water pipes before screwing.
- 2 Screws NOT supplied. Use suitable screws and plugs.
- 3 All doors are supplied at a bespoke size to your given measurements. Please make sure you double check measurements before ordering.

NOT suitable for bathrooms.

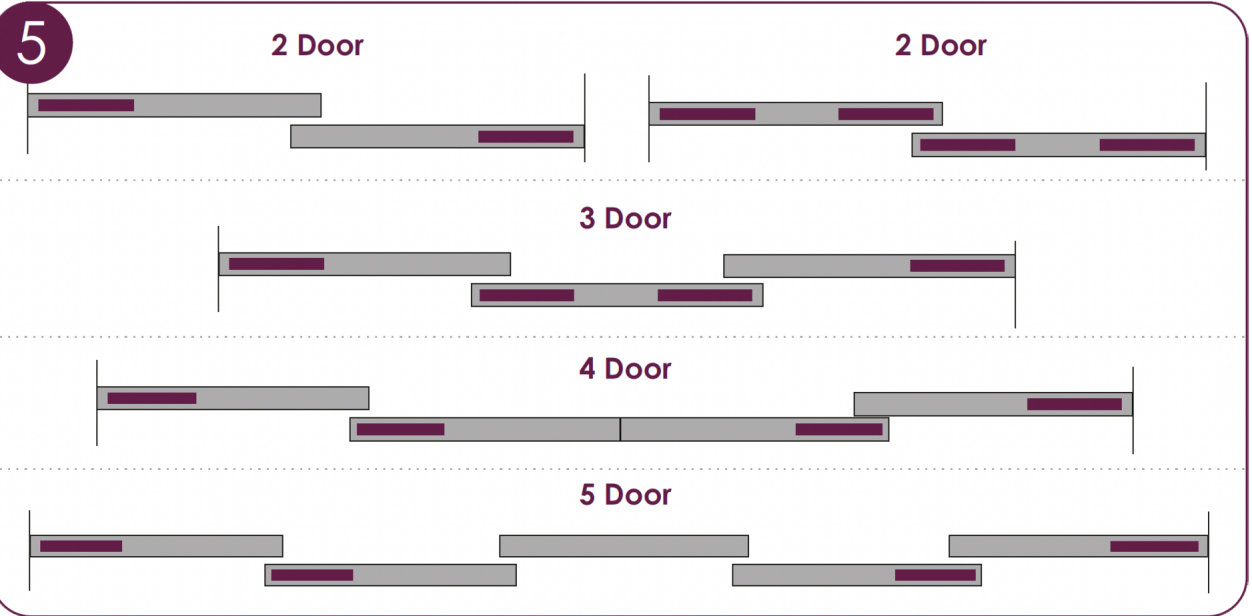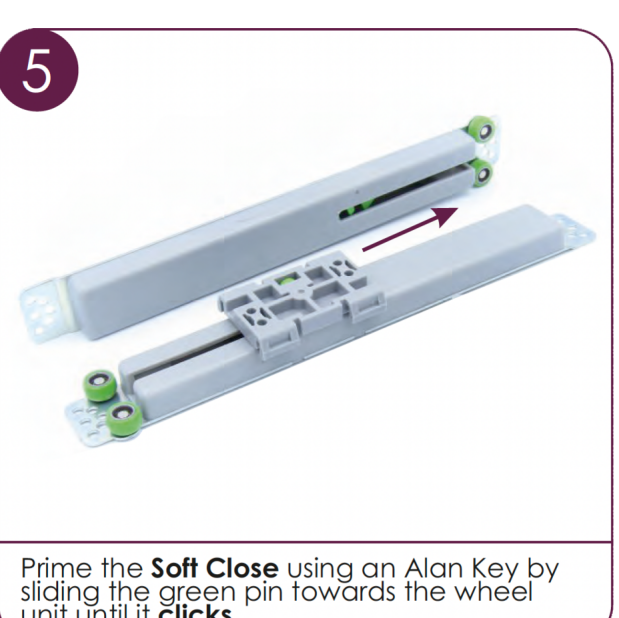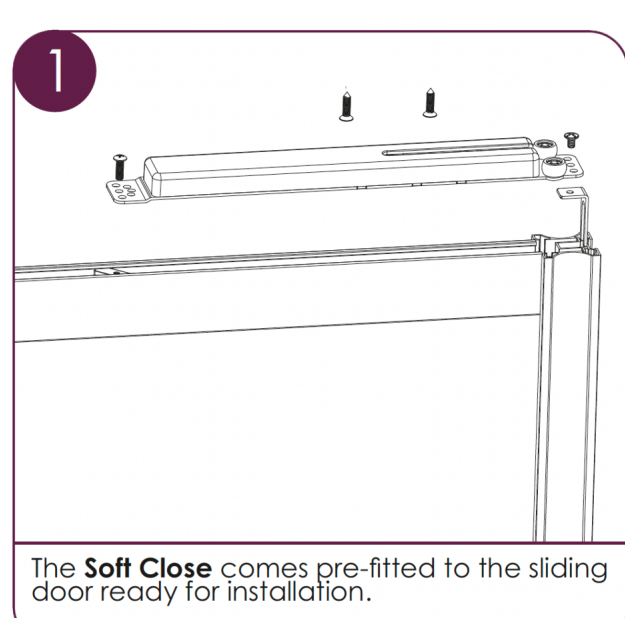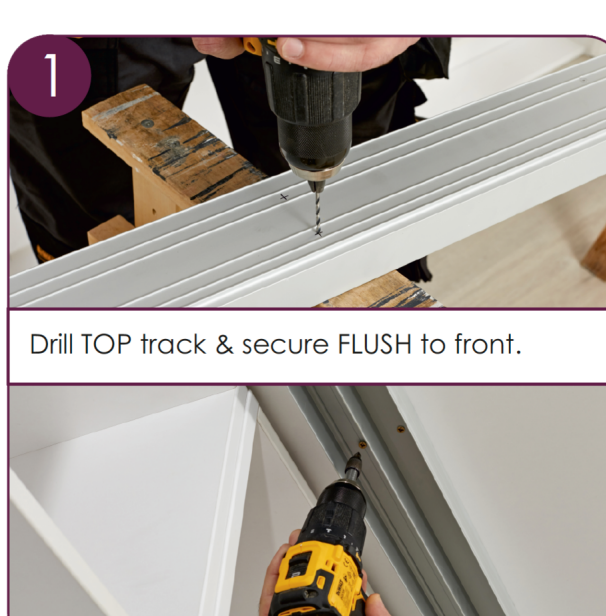

GLASS & MIRRORS

Following installation the glass will require an initial clean. Wipe the glass with a clean, soft, grit-free cloth with a mild, non-abrasive cleaning solution.

Immediately rinse with a clean damp cloth to remove any excess water/cleaning solution from the glass surface.

A squeegee may also be used. For routine cleaning, use a mild cleaning solution on a lukewarm damp cloth and dry thoroughly.



Excess use of water may damage the product.



Do not allow metal or sharp objects to touch the product.



Do not use excess pressure when cleaning

BOARD (MCF & MDF)

Following installation the board will require an initial clean. Wipe the board with a clean, soft, grit-free cloth with a mild, non-abrasive cleaning solution.

Immediately rinse with a clean damp cloth to remove any excess water/cleaning solution from the board surface.



Excess use of water may damage the board.



Do not allow metal or sharp objects to touch the product.

Frame & Tracks

Door frames should be wiped down with a clean, non-abrasive damp cloth as needed. Additional use of mild cleaning solution and water may be needed to shift stubborn dirt and stains.

Do not use harsh chemicals such as bleach, scourers or any other abrasive cleaner on the frames. If residue from glass cleaning comes into contact with the frame immediately rinse with clean warm water on a damp cloth.

Tracks should be kept free of dust and dirt with regular dusting or vacuuming. Regularly check and adjust the sliding doors where necessary to prevent scraping on the tracks. Do not use harsh chemicals such as bleach, scourers or any other abrasive cleaner on the tracks.



Excess use of water may damage the track over time.



Do not allow metal or sharp objects to touch the product.